

Type EI30/8

Power 0.8VA

Weight 60g

shipping unit per box: 40 PCS

temperature class: ta 70°C/B

Safety transformer/Short circuit proof




**Vacuum filled casting**

Split bobbin design winding

**Dielectric strength 4500Vrms**

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3008-E-0080-150-D	0.8W	230	1--5	15V 26.6mA	6--7	22.5V
				15V 26.6mA	9--10	22.5V

According to

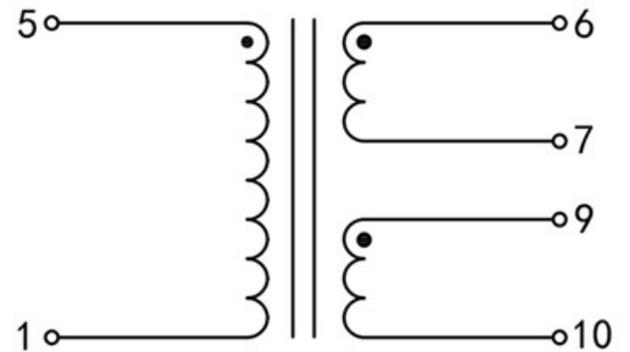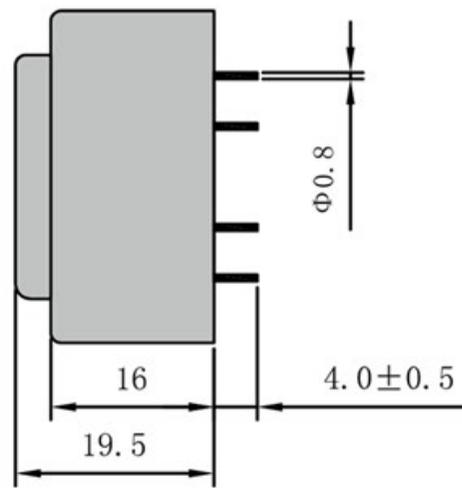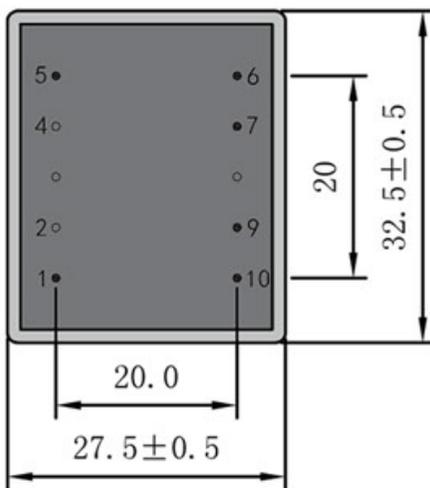

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.

