

Type EI30/5

Power 0.5VA

Weight 43g

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

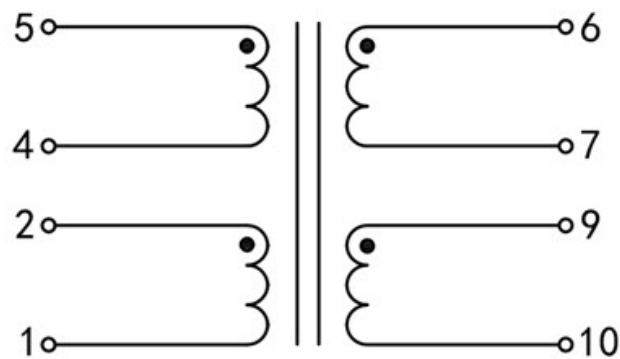
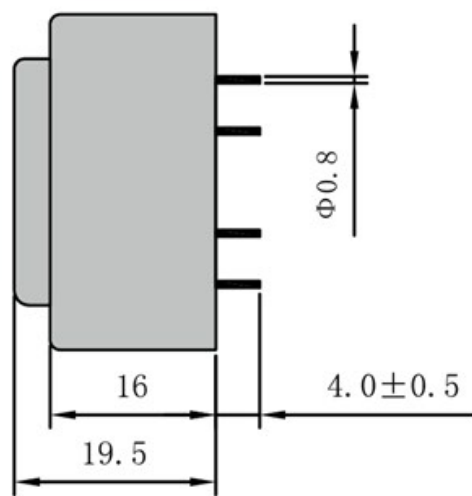
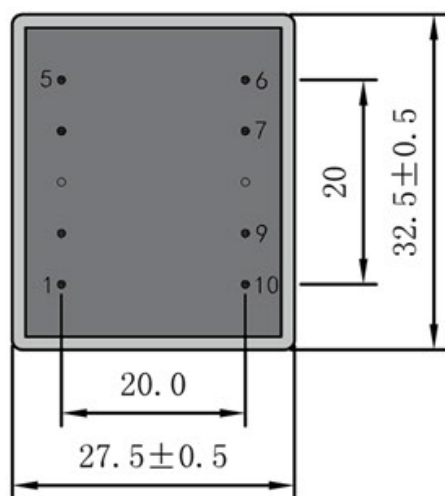
Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. $\pm 10\%$	Connecting pins	No-load voltage V $\pm 10\%$
TG3008-U2-0100-150-D	1.0W	115	1--2	15V 33.3mA	6--7	23.3V
		115	4--5	15V 33.3mA	9--10	23.3V

According to


 Dimensions with no indication of tolerances: $\pm 0.3\text{mm}$
 Custom-made transformer also will be welcome.
