

Type \_\_\_\_\_ Power 2.8VA Weight 140g

shipping unit per box: 40 PCS

temperature class: ta 70°C/B

Safety transformer/Short circuit proof

**Vacuum filled casting**




Split bobbin design winding

**with VDE, ENEC 10, UL ,CE,CB certificates**

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3023-U2-0280-120-S	2.8W	115	1--2	12V 233.3mA	7--9	17.2V
		115	4--5			

Approved by

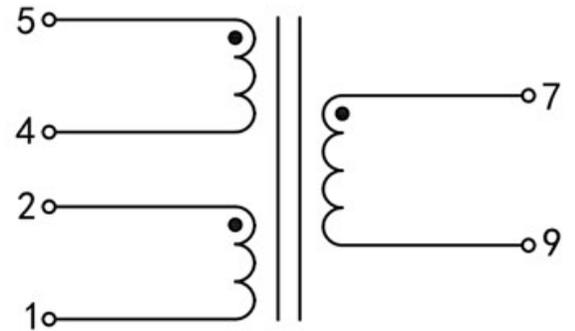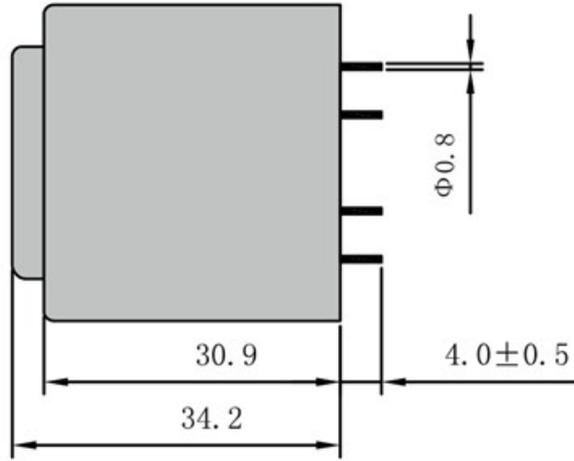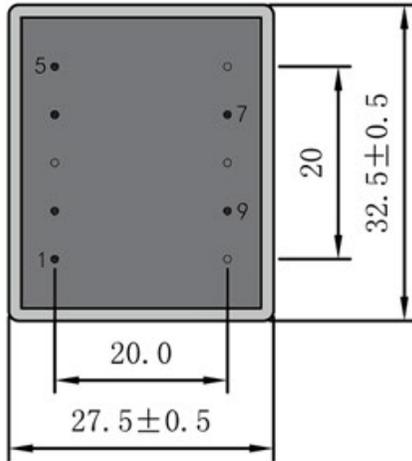

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.

