

Type EI30/23

Power 2.8VA

Weight 140g

shipping unit per box: 40 PCS

temperature class: ta 70°C/B

Safety transformer/Short circuit proof

**Vacuum filled casting**




Split bobbin design winding

**with VDE, ENEC 10, UL ,CE,CB certificates**

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3023-U2-0280-150-D	2.8W	115	1--2	15V 93.3mA	6--7	21.5V
		115	4--5	15V 93.3mA	9--10	21.5V

Approved by

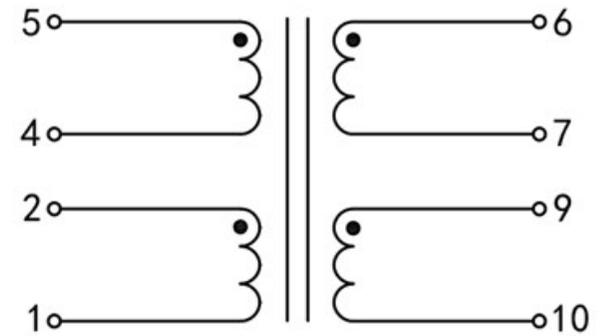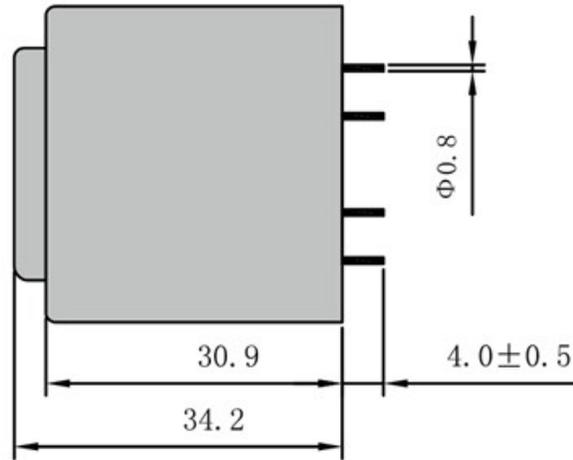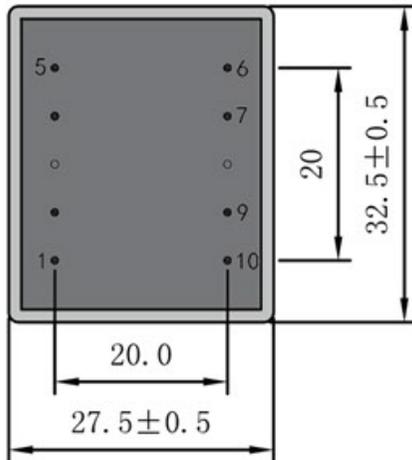

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.



We made a better future

www.tiger-transformer.com

Tel: 86-13605604993  
sale@tiger-transformer.com

